

Dry Ice Blasting Unit

ASCOJET 1208

complete (fully adjustable)

part no. 900961




The **ASCOJET 1208** features a new modern frame design and self-explanatory pictogram. This powerful blasting machine is very easy to use and is particularly suitable for use in industries.

Key benefits of the **ASCOJET 1208** is its lightness (only approx. 48 kg/106.9 lb). The newly integrated grounding roll and protective grating in the pellet hopper guarantee safer handling during the blasting process.

Powerful and very handy blasting gun:

Thanks to a **quick connect coupling** the gun can be very easily attached to the blasting unit.

Increased security thanks to the **locking pin**, which makes a sudden opening of the locking mechanism of the nozzle impossible.

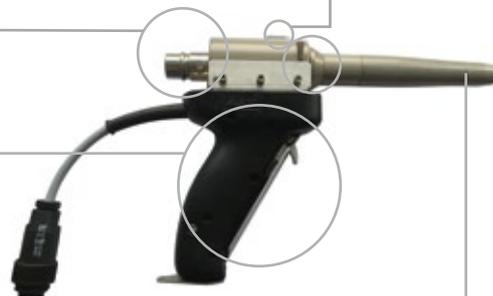

The **ergonomic gun handle** ensures very easy handling and comfortable operation when blasting over longer periods. The new developed safety button is ideal for left and right-hander.

A **quick exchange system** allows nozzles to be changed within seconds without any tools.

Specifications

Material:	frame made of steel, lateral and rear housing panels made of aluminium, powder coated
Dimensions (L x W x H) incl. wheels and folded handle:	635 x 480 x 830-1'130 mm (variable) (25 x 18.90 x 32.68-44.49 in)
Weight empty:	approx. 48.5 kg (106.9 lb)
Content of pellet hopper:	approx. 9 kg (19.84 lb)
Blasting pressure:	0 - 10 bar (0 - 145 psi) (adjustable)
Dry Ice consumption:	20 - 40 kg/h (44 - 88.2 lb/h)(stepless)
Max. power consumption:	250 W (0.33 HP) nominal
Voltage:	110 V, 50/60 Hz, 1 Ph (other voltages on request)
Connection:	Input: claw coupling Chicago 3/4"



Special features of ASCOJET 1208:



Powerful and handy blasting gun with quick connect coupling



Highly manoeuvrable



Quick connect coupling at blasting hose



Very lightweight and compact



Integrated holding device for hose



Vertically adjustable handle for easy handling



Integrated grounding wire for more safety



Insulated pellet hopper with 9 kg (19.84 lb) capacity



Control panel for easy overview

ASCOJET 1208: Standard scope of supply

Blasting gun OHS6

Standard for the ASCOJET1208
 Length: 26 cm (10.24 in)
 Weight: 1.0 kg (2.2 lb)
 Blasting pressure: 0 - 10 bar (0 - 145 psi)

OHS

part no. 4063745



High performance barrel nozzle 707.15/12

Standard for the blasting gun OHS
 Powerful nozzle with low air consumption
 Outlet opening: approx. Ø 12 mm (0.47 in)
 Length: 15 cm (5.9 in)
 Inner diameter: 7 mm (0.28 in)

OHS

part no. 4047321



Hose assembly 5m for OHS gun ID16 mm (196.85 in ID 0.63 in)

Standard for the ASCOJET 1208, can also be used as an extension of the hose assembly incl. control cable, grounded

OHS

part no. 4047104



ASCOJET 1208: Options

Pos. 001

Lighting kit for dry ice blasting gun

Kompact torch
LED light 160 lumen, 160 cm (63 in)
Up to 25 hours battery life

Length: 10.6 cm (4.2 in)
Weight: 120 g (0.35 lb)

OHS
OHP
HP

part no. 4064129



Pos. 002

Barrel nozzle 707.09/10

Thanks to an inner diameter of only 7 mm (0.27 in) the barrel nozzle has a very economical air consumption but is nevertheless powerful

Outlet opening: approx. \varnothing 10 mm (0.39 in)
Length: 9 cm (3.54 in)
Inner diameter: 7 mm (0.28 in)

OHS
OHP

part no. 4047228



Pos. 003

Flat nozzle 709.23/45

Powerful nozzle suitable for blasting large areas

Outlet opening: approx. 45x3.5 mm (1.77x0.14 in)
Length: 23 cm (9 in)
Inner diameter: 9 mm (0.35 in)

OHS
OHP

part no. 4047216



Pos. 004

Pellet cutter OHS

For sensitive blasting applications

With safety quick connect coupling, 2.5 m (8.2 ft) hose and control cable, grounded

OHS

part no. 4047026



Pos. 005

Protective sleeve for one hose system 165 mm (6.5 in)

To protect the control cable and blasting hose from dirt and damages

Available in meters

OHS
OHP

part no. 4047265



Pos. 006

Protective hood for ASCOJET 1208

The newly developed hood for our blasting equipment protects the control elements from contamination. The transparent cover can be opened for easy view on and access to the operation elements. For cleaning the hood can easily be taken off.

part no. 4064528




ASCOJET 1208: Options

Pos. 007

Spare parts kit ASCOJET 1208

Containing the most important parts to ensure quick reaction for continuous operation

part no. 4064527



Pos. 008

Compressed air hose 7.5 m (24.6 ft) / ID 25 mm (1 in)

Connecting hose between air compressor and dry ice blasting machine, incl. claw coupling and safety ring for fast and easy connection / disconnection

Material: Fabric hose / metal

Dimension: 7.5 m (24.6 ft)

Weight: 2.4 kg (5.29 lb)

part no. 4045955

